

Partial Discharge Coupling Capacitor *24kV rms / 80pF*



Key Features _____

- Nominal Voltage 24kVrms
- Build in Quadrupole with voltage reference output
- Build in Overvoltage Protection
- Capacitive floating Signal output to avoid Eddy Current Loops

Applications _____

- Hydro Generators
- Turbo Generators
- Windmills
- Industrial Motors

PDC24-0080

General Description _____

The 80pF coupling capacitor is a sensor used for online and offline partial discharge measurements on rotating machines. The sensor will be usually installed at the busbar or on the high voltage terminals of the rotating machine. Permanent or temporary partial discharge detectors / analyzers can be connected via standard RG58 BNC cables to the coupler, usually by using a termination box in between.

The **PDC24-0080** has an integrated high voltage cable which will be connected via cable lugs to the high voltage busbars of the rotating machine to pickup partial discharge signals without any loss. A specially designed measurement impedance located in the base of the sensor allows to pickup partial discharge signals as well as the line frequency. This allows to transfer partial discharge signals and line frequency signal over the same cable to the partial discharge detector.

The Signal output is protected via 90V surge arrester. The 'shield' of the coaxial output is capacitive floating to avoid eddy currents in the signal cables due to high magnetic fields.

Ordering Information _____

Order Code: 18.0240.0080

Partial Discharge Coupling Capacitor

24kV rms / 80pF



Technical Data

PDC24-0080

Electrical

Nominal Voltage:	24kV rms	PD Level @ Un:	< 5pC
Capacitance:	80pF +/-5%	Signal Output Type:	BNC female
Frequency Range:	50/60Hz	Ground Connection:	M6
Withstand Voltage (1min):	61kVrms	Creeping Distance (mm):	~326
Lightning Impulse Withstand (BIL):	144kVp (1.2/50us, 10p / 10n)		

Environment


Operating Temperature Range: -20 .. +125°C

Mechanical


Mounting / Fixing: 4x M8 Allen Key Screws Electrical Connection: M12

Dimensions

Outline:

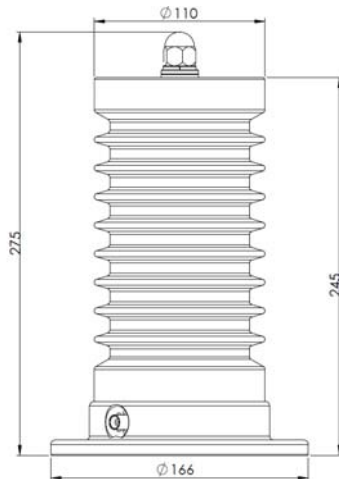

Fixing:

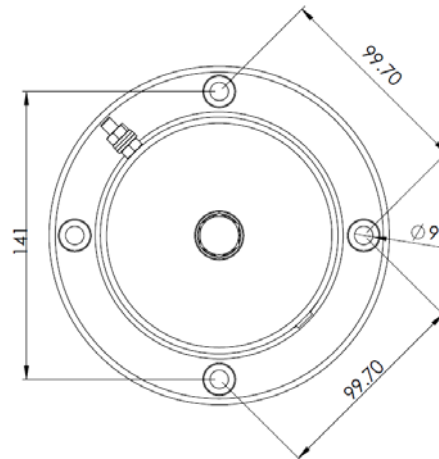

Sparks Instruments reserves the right, without further notice, to change the product specifications and/or the information on this document to improve reliability, functions and design of this product. © 2013 Sparks Instruments, All rights reserved.

Contact

Sparks Instruments SA
Bodematta 12, 1714 Heitenried
Switzerland

Email: sales@sparksinstruments.com
Web: www.sparksinstruments.com

Worldwide Exclusive Sales Representative
& Tech Support

 **MC-monitoring SA**
Measuring - Consulting - Monitoring

Route André Piller 19
1762 Givisiez / Switzerland
Phone: +41 58 411 54 00
sales@mc-monitoring.com